



**ROTARY
CYLINDER**


Compact Style Hydraulic Cylinder with Open Center SS series

Accommodates BB200 and B-200 series
Compact design advantages Lathes in full performance


- Compact : 30% reduction in length of current S series.
- Speed Increased
- One size large chuck is enabled to operate



Dimensional Drawings

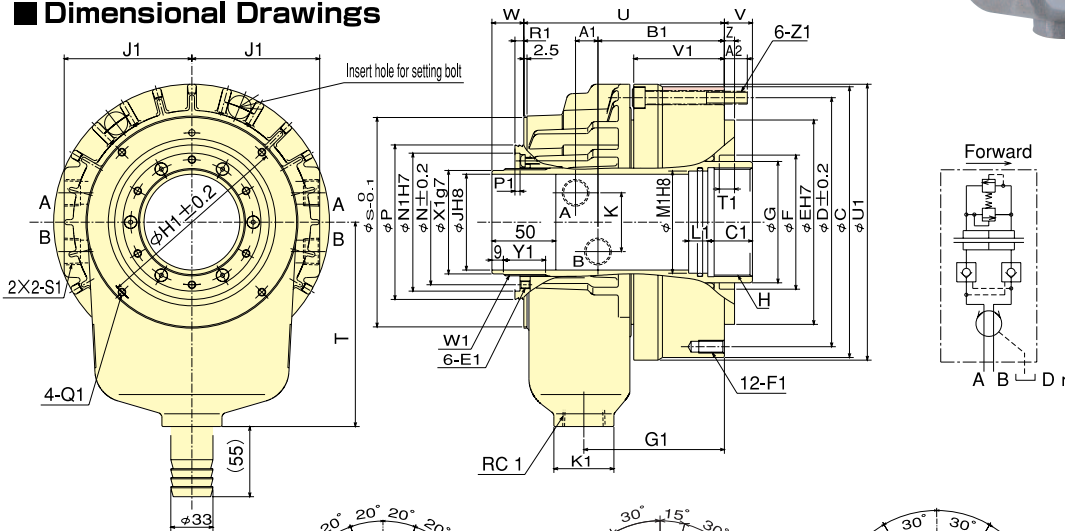

Front Side

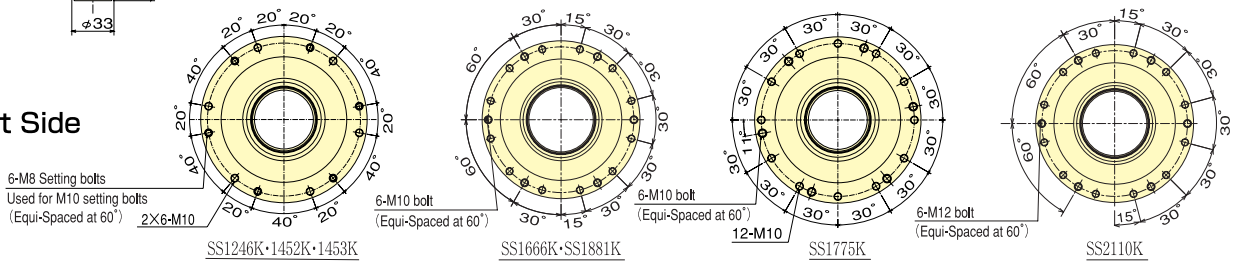

Dimensions

Model	C	D	E	F	G	H	J	K	N	P	S	T	U	V max.	V min.	W max.	W min.	Z	A1	B1	C1
SS1246K	162	147	130	75	65	M55×2	46	40	64	85	116	120	120	13	-3	41	25	8	8.5	79.5	25
SS1452K	180	165	140	80	70	M60×2	52	40	73	96	135	130	130	19	-3	47	25	8	9.0	88	30
SS1453K	180	165	140	80	70	M60×2	53	40	73	96	135	130	130	19	-3	47	25	8	9.0	88	30
SS1666K	207	190	168	95	85	M75×2	66	48	88	111	154	150	150	22	-3	50	25	8	13.0	99.5	35
SS1775K	212	195	160	105	95	M85×2	75	46	98	121	164	160	157	22	-3	50	25	8	17.5	99	35
SS1881K	222	205	168	110	100	M90×2	81	46	103	126	175	175	167	23	-2	50	25	8	17.0	106	35
SS2110K	260	240	200	135	125	M115×2	106	46	133	160	210	200	192	27	-3	55	25	8	20.0	120.5	35

Model	E1 depth	F1 depth	G1	H1	J1	K1	L1	M1	N1	P1	Q1 depth	R1	S1	T1	U1	V1	W1	X1	Y1	Z1	A2
SS1246K	M6×6	M10×20	84	98	76	47	15	50	76	4	M5×6	6	Rc ³ / ₈	12	165	57.5	M52×1.5	50	29	M8	15
SS1452K	M6×7	M10×20	93	110	86	47	15	55	85	4	M6×6	7	Rc ³ / ₈	12	184	66.5	M58×1.5	56	29	M8	12
SS1453K	M6×7	M10×20	93	110	86	47	15	55	85	4	M6×6	7	Rc ³ / ₈	12	184	66.5	M58×1.5	56	29	M8	12
SS1666K	M6×7	M12×24	108	145	97	47	15	70	100	4	M6×10	7	Rc ¹ / ₂	12	211	71	M74×1.5	71.5	33	M10	19
SS1775K	M6×8	M10×20	110	155	100	47	15	80	108	4	M6×10	7	Rc ¹ / ₂	12	216	71	M84×2	81	33	M10	18
SS1881K	M6×8	M12×24	115	166	105	47	15	85	113	4	M6×10	7	Rc ¹ / ₂	12	226	71	M89×2	86	33	M10	19
SS2110K	M6×8	M12×24	130	201	124	47	15	110	145	4	M6×10	7	Rc ¹ / ₂	12	263	79.5	M118×2	115	38	M12	18

Specifications

Model	Piston Dia. mm	Plunger Stroke mm	Draw bar		Max. Operation Pressure MPa (kgf/cm ²)	Max. Speed (min ⁻¹ r.p.m)	Moment of inertia kg·m ²	Net Weight kg	Total leakage ℓ /min
			Push Side kN (kgf)	Pull Side kN (kgf)					
SS1246K	128	16	43.6(4466)	38.9(3967)	4.5(45.9)	8000	0.017	8.0	3.0
SS1452K	145	22	56.5(5761)	52.1(5313)	4.5(45.9)	6500	0.031	13.0	3.9
SS1453K	145	22	56.5(5761)	52.1(5313)	4.5(45.9)	6500	0.031	13.0	3.9
SS1666K	165	25	70.6(7199)	65.0(6628)	4.5(45.9)	5600	0.065	19.0	4.0
SS1775K	170	25	70.7(7209)	64.7(6587)	4.5(45.9)	5500	0.061	18.5	4.2
SS1881K	180	25	79.5(8107)	73.1(7454)	4.5(45.9)	4800	0.087	24.0	4.3
SS2110K	210	30	74.7(7617)	71.0(7240)	3.5(35.7)	3500	0.197	37.0	6.0