



CHUCK


Pull Lock Chuck PU series

Pull back chuck for external gripping




- **High gripping stability means heavy cutting is possible**
Radial gripping forces and strong pull back action allow stable heavy cutting.
- **Excellent repeatability!**
Side and rear support provided by the base jaws reduces the centrifugal gripping force loss thus resulting in high repeatability.
- **Long-term stable accuracy!**
The sophisticated mechanism and special steel design ensure longevity and gripping accuracy.
- **Compatible with automation by use of seating confirmation**
*CE correspondence


Dimensional Drawings

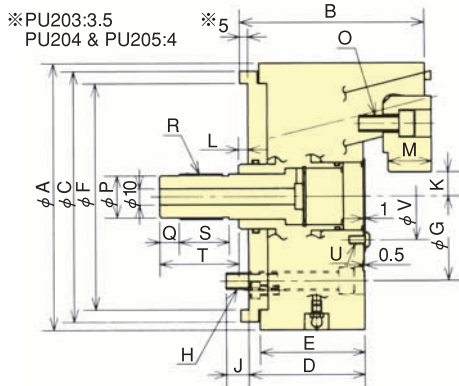



Work Examples

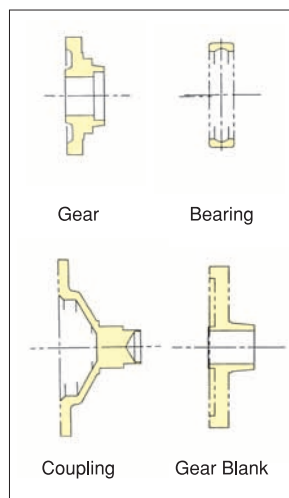


Gripping Examples

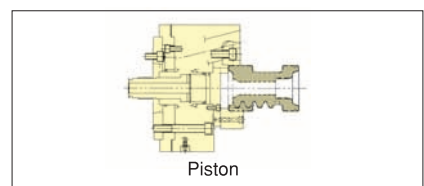


Gripping Performance

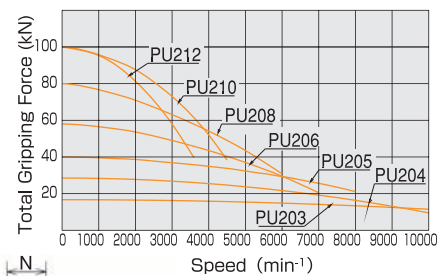

PU203~PU205



PU206~PU212



PU203~PU205
(Drawbar connection)

Dimensions

Model	A	B	C	D	E	F (G7)	G	H	J	K max.	K min.	L max.	L min.	M	N	O	P	Q	R	S	T	U	V
PU203	75	54.5	75	38.5	34	69	54	3-M6	9	2.5	1.5	21.5	17.5	9	15	3-M5	8	10	M10	19	-	3-M3	25.5
PU204	110	72.5	100	51	43	85	70.6	3-M10	12	10.75	9.25	19	13	14	20	3-M6	18	12	M20x1.5	24	-	3-M4	42
PU205	135	84.5	135	59	51	110	82.6	3-M10	15	13.25	11.75	23	17	17	24	3-M8	23	12	M25x1.5	30	-	3-M5	52
PU206	165	115	155	72	65	140	104.8	6-M10	14	16.25	13.75	11	1	27	30	3-M10	26	12	M28x1.5	31	49	3-M5	54
PU208	210	135	180	85	70	170	133.4	6-M12	15	16.25	13.75	11	1	31	35	3-M12	32	15	M35x1.5	30	51	3-M6	65
PU210	254	150	230	95	82	220	171.4	6-M16	23	21.25	18.75	12	2	35	40	3-M14	35	15	M38x1.5	30	51	3-M8	80
PU212	304	155	240	95	82	220	171.4	6-M16	23	46.25	43.75	12	2	40	40	3-M14	42	15	M45x1.5	30	51	3-M10	100

Specifications

Model	Gripping range		Jaw Stroke (diameter)mm	Plunger Stroke mm	Max. Draw Bar Pull Force kN(kgf)	Max. Gripping Force kN(kgf)	Max. Speed min⁻¹	Net Weight with Soft top jaws kg	Moment of inertia kg·m²	Matching Cylinder	Max. pressure MPa(kgf/cm²)
	Max. mm	Min. mm									
PU203	32	4	2	4	5.8 (590)	16.7 (1700)	10000	1.5	0.0012	YG-329	1.63 (16.6)
PU204	60	10	3	6	10.0 (1020)	28.5 (2906)	8000	3.8	0.006	F0933H	2.06 (21.0)
							10000			YG-296	1.18 (12.0)
PU205	84	15	3	6	14.0 (1428)	40.0 (4079)	8000	6.6	0.017	F0933H	2.50 (25.5)
PU206	100	25	5	10	18.0 (1835)	58.0 (5914)	7000	14.1	0.050	Y1020R	2.55 (26.0)
PU208	130	25	5	10	25.0 (2549)	80.0 (8158)	6000	24.0	0.133	Y1225R	2.50 (25.5)
PU210	160	35	5	10	35.0 (3569)	100.0 (10197)	4500	42.0	0.338	Y1225R	3.35 (34.2)
PU212	210	85	5	10	35.0 (3569)	100.0 (10197)	3600	60.5	0.655	Y1225R	3.35 (34.2)

Advanced Chuck